

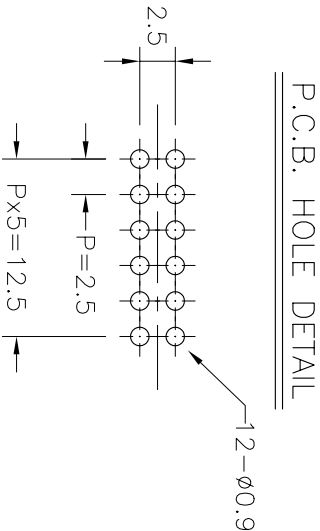
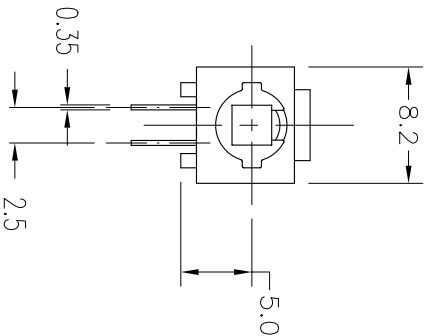
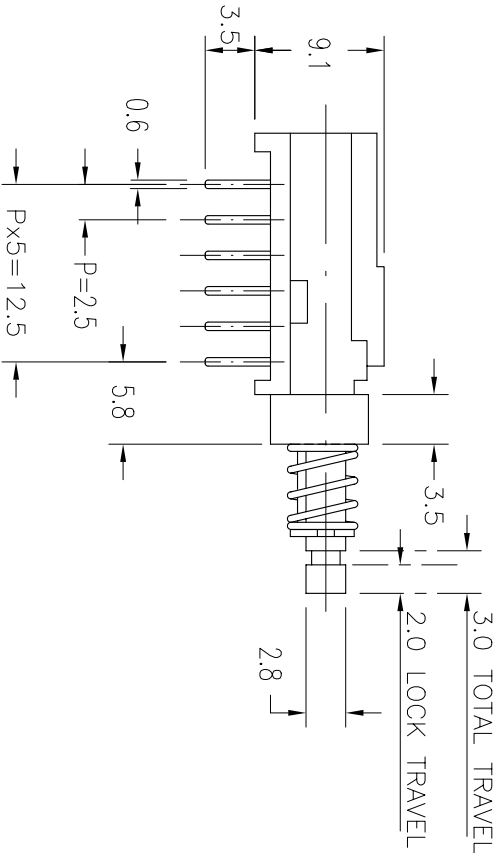


DATE	DESCRIPTION	REV.
2001/05/10		01
2003/01/20		02

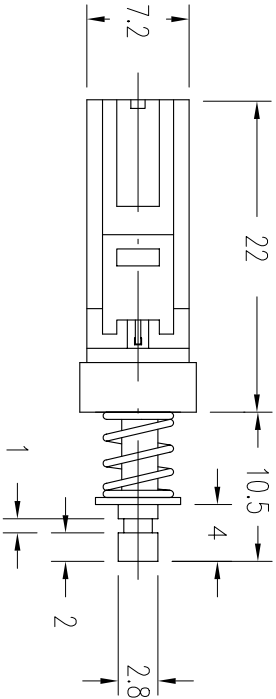

SCHEMATIC



DIMENSION	TOLERANCE
BELOW 10mm	±0.3
10~100mm	±0.5
ABOVE 100mm	±0.8
ANGLE	±3°

- 1.RATING: 0.1 A/30 V DC.
- 2.CONTACT RESISTANCE:20 mΩ MAX.
- 3.INSULATION RESISTANCE:500 V DC ,100 MΩ MIN.
- 4.OPERATING FORCE:100~400 gf.
- 5.OPERATING TEMPERATURE RANGE:-10°C~+60°C
- 6.OPERATING LIFE: 10,000 CYCLES.

CUSTOMER:	DATE	DRAWN BY	CHECKED BY	APPROVAL BY	TITLE:	PART NO:	DWG NO:
	2003/01/20	Mero					
UNIT: m/m					PD SERIES PUSH BUTTON SWITCH	PD-S4L	PDS4L

WBWell Buying
Industrial Co.,Ltd.