


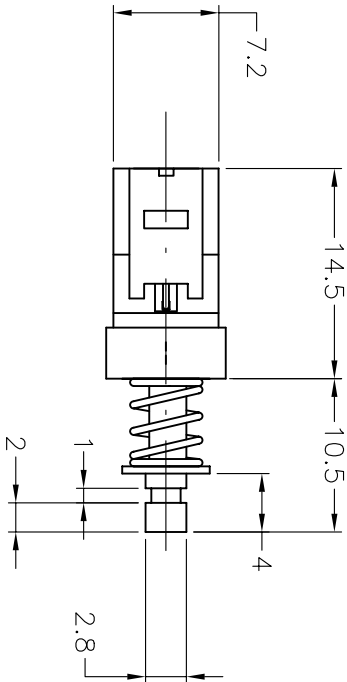


DATE	DESCRIPTION	REV.
2003/01/06		01

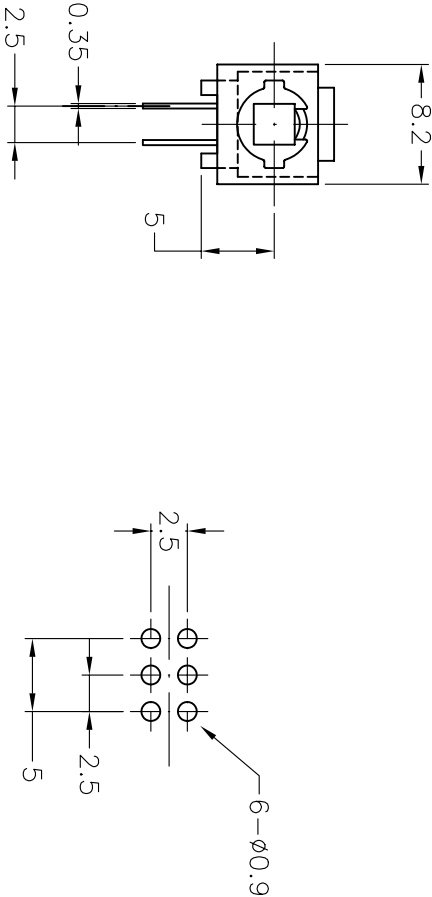

SCHEMATIC

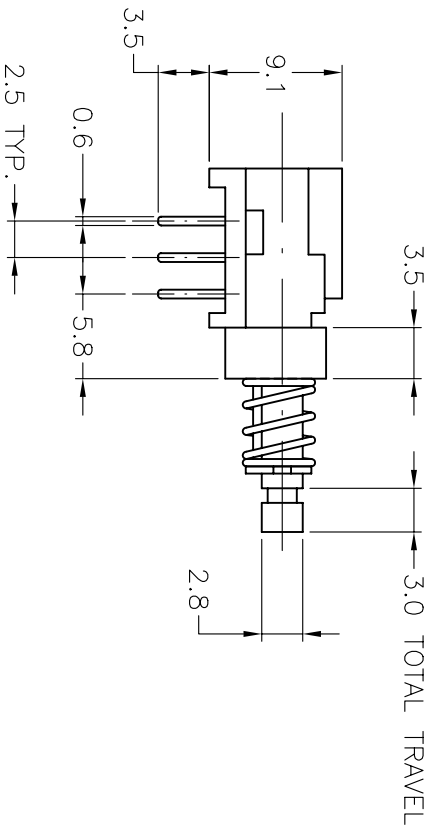

DIMENSION	TOLERANCE
BELOW 10mm	±0.3
10~100mm	±0.5
ABOVE 100mm	±0.8
ANGLE	±3°

- 1.RATING : 0.1A/30V DC.
- 2.CONTACT RESISTANCE : 20mΩ MAX.
- 3.INSULATION RESISTANCE : 500V DC,100MΩMIN.
- 4.OPERATING FORCE : 100~400 gf .
- 5.OPERATING TEMPERATURE RANGE : -10℃~+60℃.
- 6.OPERATING LIFE : 10,000 CYCLES.

P.C.B. HOLE DETAIL

CUSTOMER:	DATE	DRAWN BY	CHECKED BY	APPROVAL BY	<div>WBWell Buying</div> <div>Industrial Co.,Ltd.</div>	TITLE: <div>PD SERIES PUSH BUTTON SWITCH</div>	PART NO: <div>PD-S2L</div>	DWG NO: <div>PD-S2L</div>
	2003/01/06	KAVEN						
	UNIT: m/m							

PD SERIES PUSH
BUTTON SWITCH